



ALV2 (ALVB) series/ Peripherals

Panic Bar Interface

Rim & Surface Mounted Vertical Rod Panic Options:

The commercial grade 1 exit device is designed for institutional and commercial uses such as educational, health care, industrial, and hospitality facilities where long lasting, highly durable product is required.

Performance Features

- Tested and certified to significantly exceed 1,000,000 cycles—well above the requirements for Grade 1 certification.
- Thru-Bolted trim design for increased security and durability.
- Consistent styling to match any décor.
- Tested and Certified.
- ANSI/BHMA A156.3 Series Grade 1
- UL/cUL Listed (3 hours)
- UL10C/UBC 7-2
- UL305 for Panic Hardware
- ANSI A117.1 (ADA Compliant)
- ALVB Available with Mobile key option.

Tested and Certified

- ANSI/BHMA a156.3 Series Grade 1
- UL Listed for Panic Exit
- Non Handed



RIM Exit Device



Vertical Rod Exit Device




Out door side : ALV2(ALVB)-P type

Specifications

Finish available for pushbar	Satin Chrome, Polished Chrome, Satin Brass, Antique / Dark Brown
Finish available for Miwa exit device kit	Satin Stainless (ST) / Polished Stainless (SB) / Satin Brass (BS) / Polished Brass (YB) / Mid Bronze (CB)
Reader	RFID (ISO 14443-A) compatible
Systems	ALV2(ALVB)
Handing	left hand reverse-right hand reverse
Door requirements	1-3/4" to 2-1/4"
Door types	wood, hollow metal, fiberglass, or aluminum
Door width	36" stock - 48" available at additional cost
Door height without rod extensions	7' standard with 84" rods - extensions available at additional cost
Stile width	5" minimum

Diagram

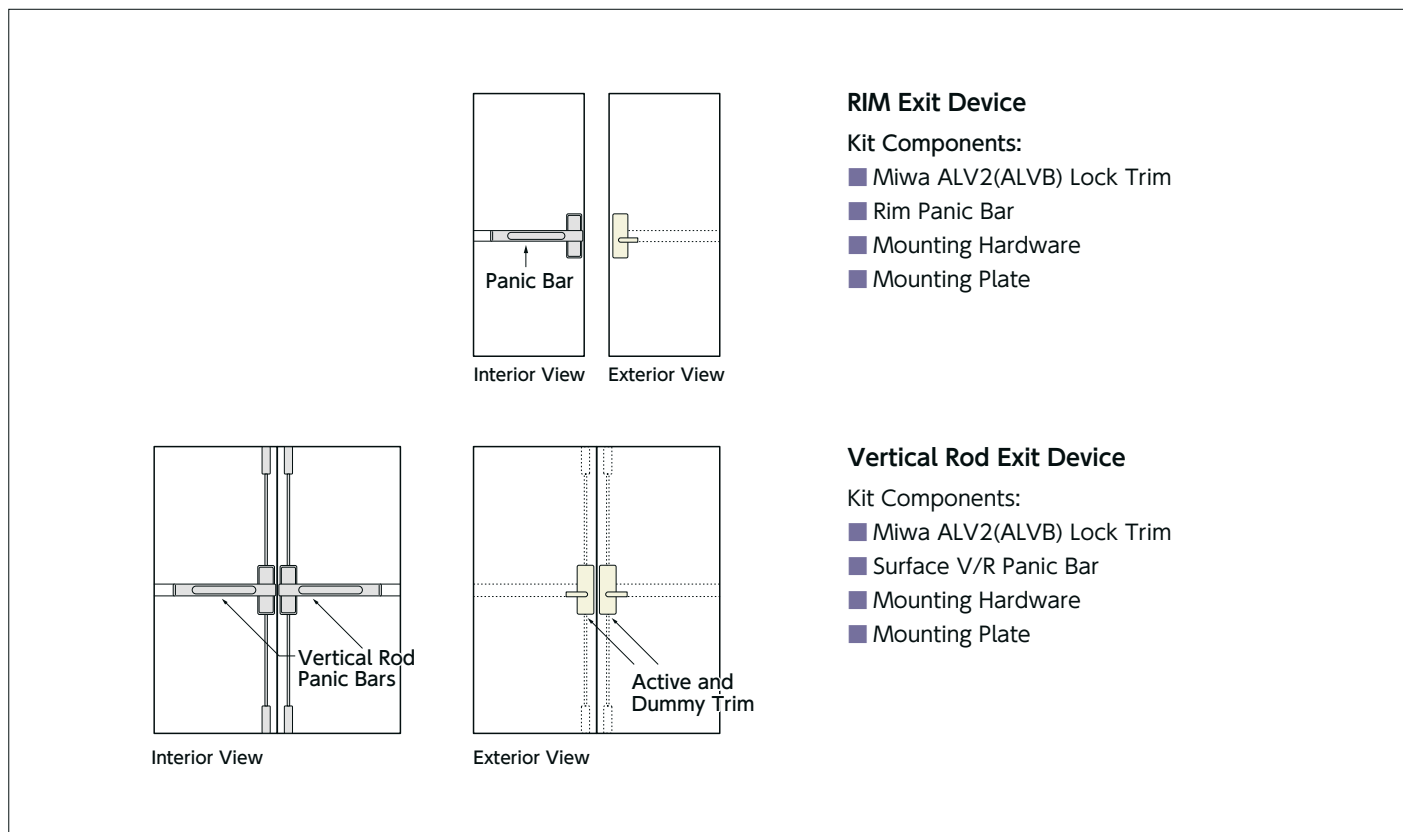

MIWA LOCK CO., LTD.

JAPAN 3-1-12, Shiba, Minato-ku, Tokyo 105-8510
 TEL: +81-3-3452-5568 FAX: +81-3-3452-5911 URL: www.miwa-lock.biz

U.S.A 9272 Jeronimo, Suite 119, Irvine CA 92618
 TEL: +1-949-328-5280 / Toll free: +1-888-412-9750 FAX: +1-949-328-5281 URL: www.miwalock.com